



## GT1B5B Can Slitting Machine

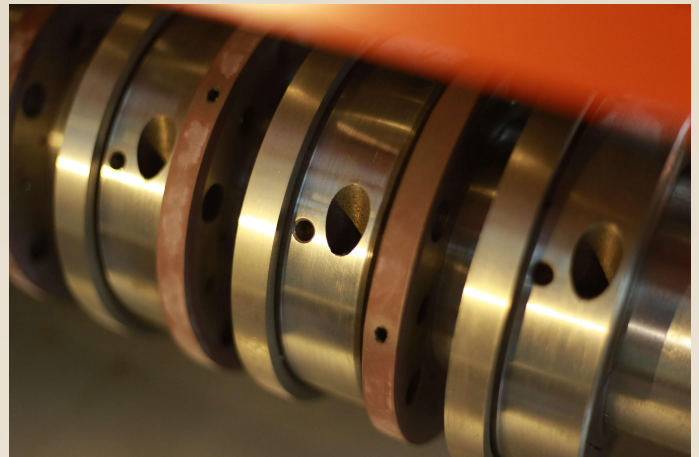


### Major technical parameters:




Maximum thickness of sheet iron(mm)	0.14-0.5
Maximum width of sheet iron(mm)	1050-1300
Minimum width of sheet iron(mm)	38
Motor power (kw)	1.1-1.5
Size (mm)	(1470) 1720×1000×1100
Weight (kg)	1200-1400

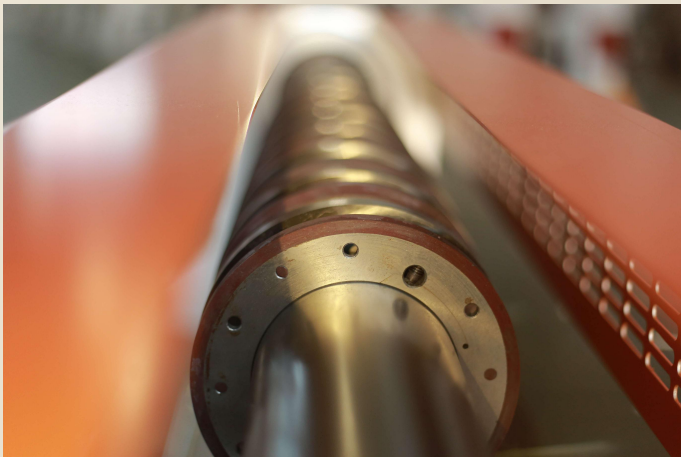

## Automatic Rolling Machine

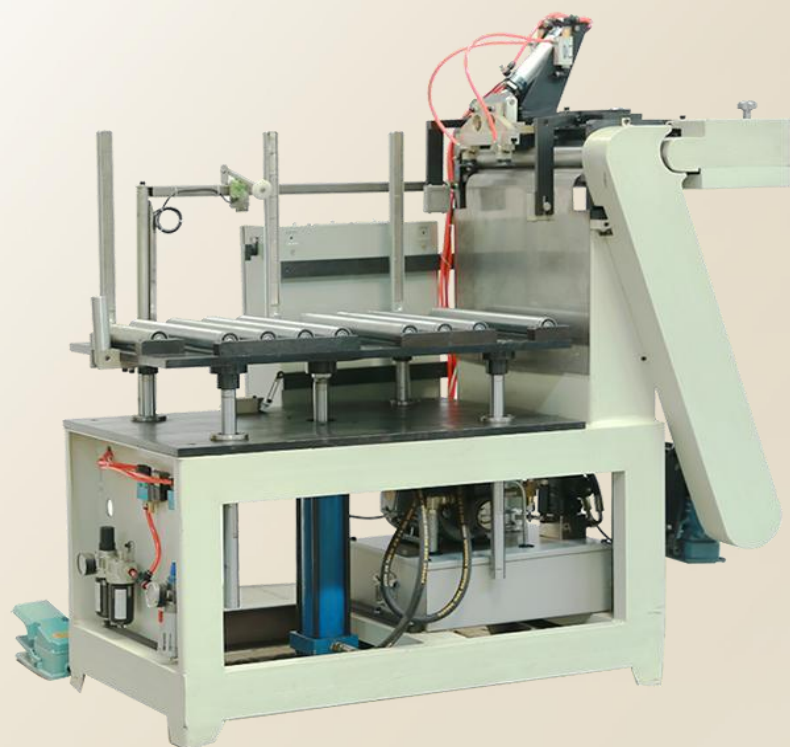



Major technical parameters	
Rolling diameter(mm)	80-290
Can body height (mm)	85-500
Tinplate thickness (mm)	0.2-0.4
Rolling motor power (KW)	0.75
Raising motor power (KW)	1.5
Voltage (V)	380
Output capacity (pcs/min)	10-50
Size (mm)	2025×890×1550

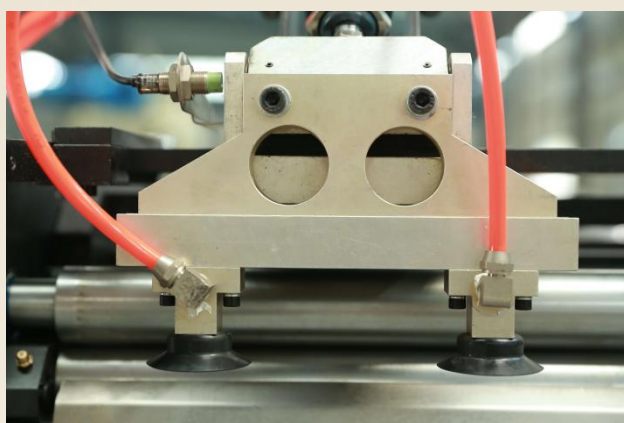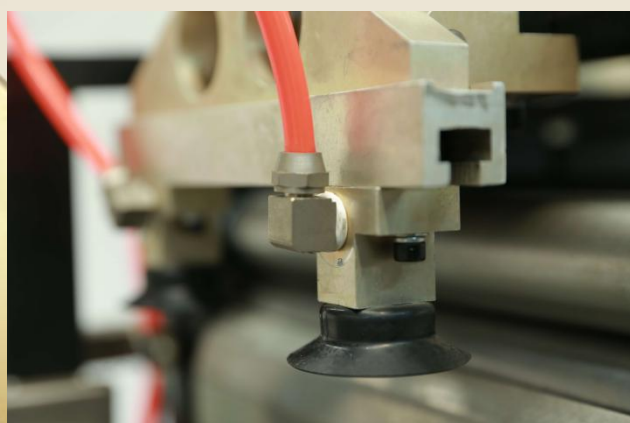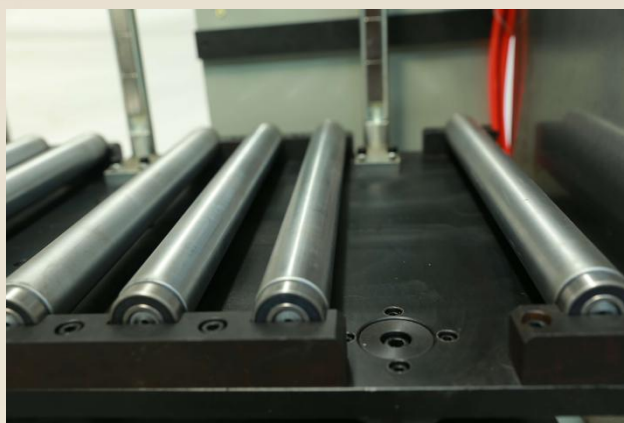

# Rear-feeding seam welder machine




I.Major technical parameters		
Model	GNWT-286S	GNWT-180S
Linear rate of welding	5-30m/min	
Production capability	10-20mm	8-15mm
Can body diameter	D50-400mm	D52-180mm
Can body hight	190-420mm	
Applicable material	Tinplate Steel-based	Tinplate Steel-based
Applicable material thickness	0.22-0.42mm	0.18-0.42mm
Seam welding landing	0.8mm 1.0mm 1.2mm	0.6mm 0.8mm 1.2mm
Seam point distance	0.5-0.8mm	
Applicable copper wire diameter	Φ1.38mm Φ1.5mm	Φ1.38mm
Cooling water	Temperature:20°C Pressure:0.4-0.5Mpa Discharge:7L/min	
Total power	18KVA	
Power supply	380V±5% 50Hz	
Machine dimension	1200*110*1800mm	
Gross weight	1200KG	

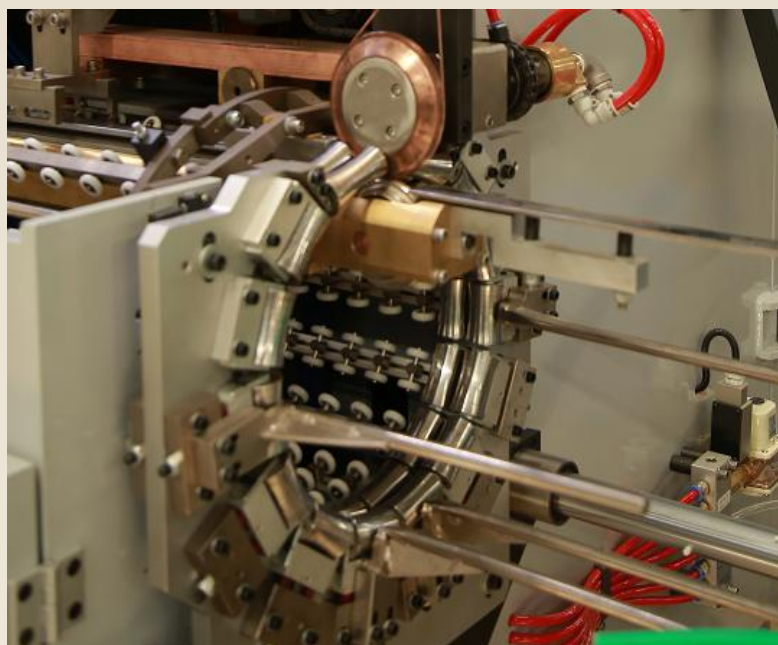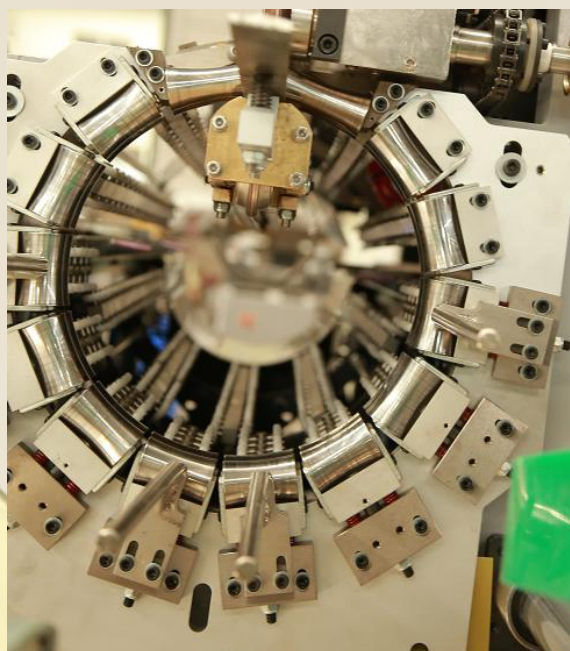



II. Major technical References

Scope of application (L)	9-20
Maximum oil pressure(Mpa)	15
Thickness of tinplate (mm)	0.25-0.35
Working air pressure(Mpa)	0.3
Production capacity (cpm)	15-20
Volume of oil tank(L)	125
Power(kw)	7.5
Size(mm)	1400×730×1200
Applied electric source	AC 380V-415V 50HZ
Weight(kg)	1280


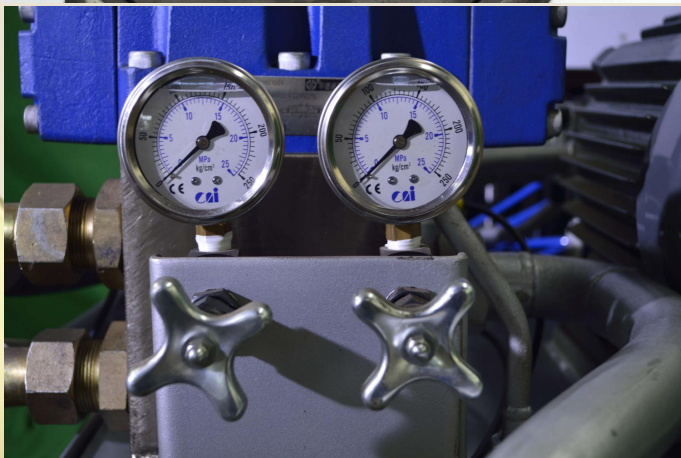


## YX-18LF square can flanging machine



### Technical parameters



Scope of application (L)	1-20
Thickness of tinplate (mm)	0.2-0.4
Production capacity (cpm)	15-20
Power(kw)	1130×700×960
Weight(kg)	3.7
Size(mm)	420

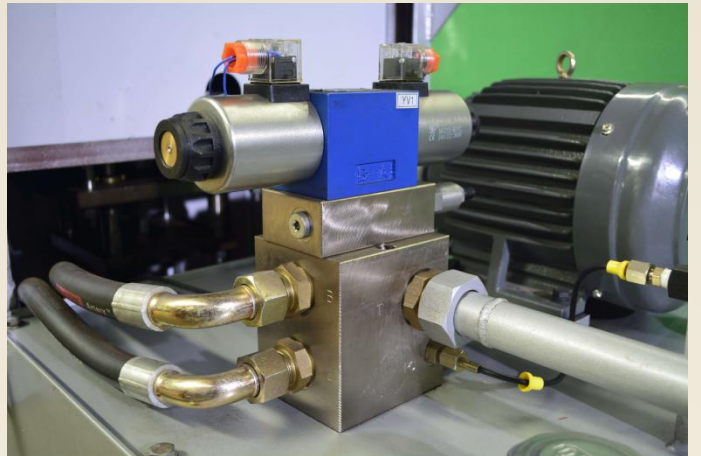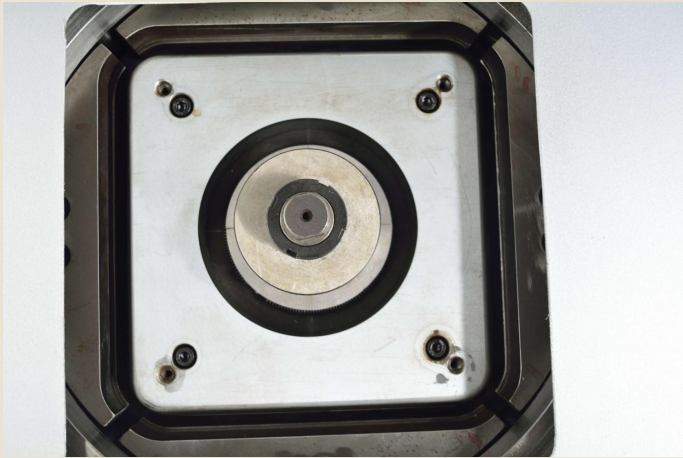

## GT4A28Q Pneumatic tin can sealer



Major technical parameters	
Production capacity (cpm)	12-16
Diagonal line(mm)	50-330
Height (mm)	50-400
Thickness of tinplate(mm)	≤0.4
Air pressure (mpa)	0.4-0.8
Power (kw)	2.2
speed (rpm)	940
Size (mm)	980×580×1900
Weight (kg)	800

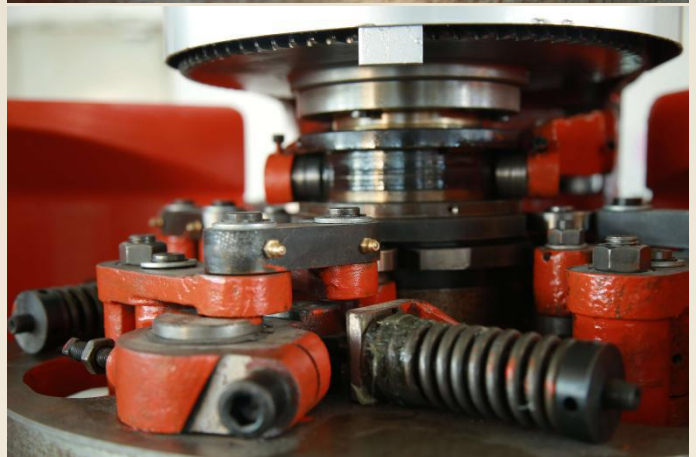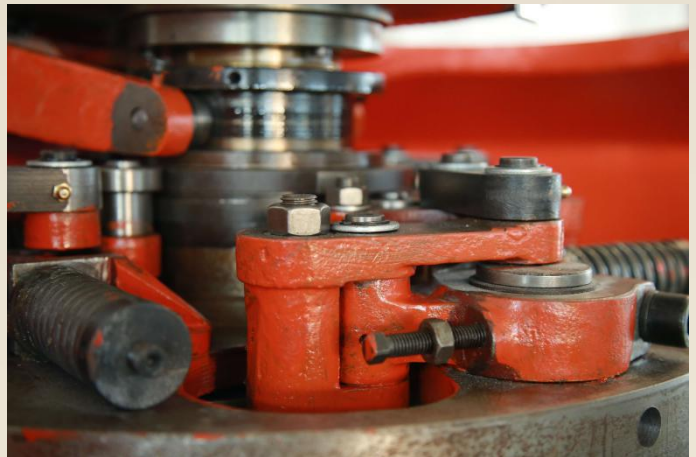

whatsapp: +86-13707928084

Email: jjyixin2020@gmail.com

Address: Binjiang Avenue (Yanjiang Industrial Base), Jiujiang City, Jiangxi Province, China